



## NXB-125 Moulded case circuit breaker

### 1. Compliant standards

IEC60947-2

### 2. Compliant certification

CE

### 3. Major function

Overload protection, short circuit protection, positive isolation

### 4. Technical parameters

Rated current: 63A, 80A, 100A, 125A;

Rated voltage: 240V ~ (1P), 415V ~ (2P, 3P, 4P);

Frequency: 50Hz;

Electromagnetic release type: C, D;

Number of poles: 1P, 2P, 3P, 4P;

Mechanical life: 20000 cycles;

Electrical life: 6000 cycles ( $I_n \leq 100A$ ); 4000 cycles ( $I_n > 100A$ );


Rated short-circuit breaking capacity ( $I_{cu}$ ): 10000A;

Short-circuit breaking capacity ( $I_{cs}$ ): 7500A;

Rated impulse withstand voltage ( $U_{imp}$ ): 4kV;

Power consumption on each pole of the circuit breaker: see Table 1.

### 5. Dimensions and installation sizes

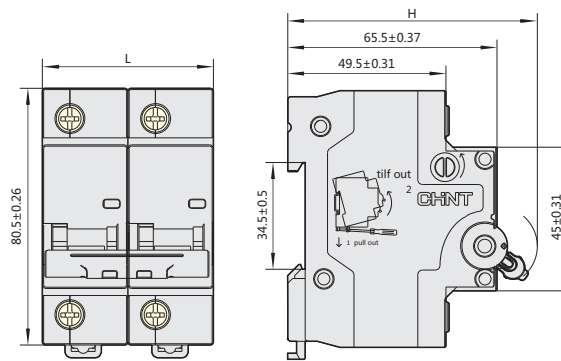

	1P	2P	3P	4P
L(mm)	$27^{+0}_{-0.52}$	$54^{+0}_{-0.74}$	$81^{+0}_{-1.40}$	$108^{+0}_{-1.40}$
H(mm)	$75.5^{+0}_{-1.20}$	$78.5^{+0}_{-1.20}$	$78.5^{+0}_{-1.20}$	$78.5^{+0}_{-1.20}$



تهران - خیابان لاله زارنو - بالاتر از منوچهری - پاساژ البرز ۲۰ - طبقه اول - واحد ۲۳۵

۰۲۱-۶۶۳۴۱۰۹۰-۹۲

۰۹۳۹۶۲۹۲۰۰۱

[splus.ir/peoe\\_iran](https://splus.ir/peoe_iran)

[aparat.com/peoe\\_iran](https://aparat.com/peoe_iran)

[www.peoe.ir](http://www.peoe.ir)

[t.me/peoe\\_iran](https://t.me/peoe_iran)

[instagram.com/peoe\\_iran](https://instagram.com/peoe_iran)